

54


REVERSIBLE SUBLIGHT (SIDE HUNG) STANDARD MODULE



Height	Code	Code	Code	Code	Code
1050	RVSL110C	RVSL210CF	RVSL210CFW	RVSL310CFC	RVSL310CFCW
1200	RVSL112C	RVSL212CF	RVSL212CFW	RVSL312CFC	RVSL312CFCW
1350	RVSL113C	RVSL213CF	RVSL213CFW	RVSL313CFC	RVSL313CFCW
1500	RVSL115C	RVSL215CF	RVSL215CFW	RVSL315CFC	RVSL315CFCW
1650	RVSL116C	RVSB216CF	RVSL216CFW	RVSL316CFC	RVSL316CFCW

55

REVERSIBLE SUBLIGHT (SIDE HUNG) NARROW MODULE

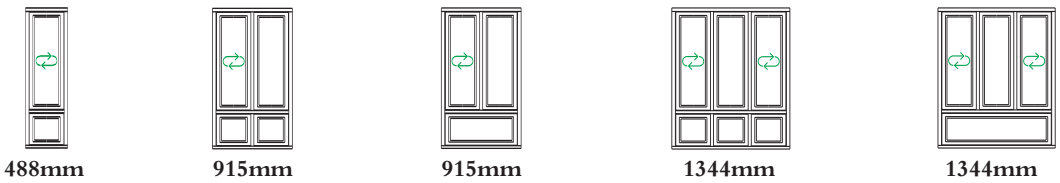

Height	Code	Code	Code	Code	Code
1050	RVSLN10C	RVSL2N10CF	RVSL2N10CFW	RVSL3N10CFC	RVSL3N10CFCW
1200	RVSLN12C	RVSL2N12CF	RVSL2N12CFW	RVSL3N12CFC	RVSL3N12CFCW
1350	RVSLN13C	RVSL2N13CF	RVSL2N13CFW	RVSL3N13CFC	RVSL3N13CFCW
1500	RVSLN15C	RVSL2N15CF	RVSL2N15CFW	RVSL3N15CFC	RVSL3N15CFCW
1650	RVSLN16C	RVSL2N16CF	RVSL2N16CFW	RVSL3N16CFC	RVSL3N16CFCW



The reversible range features a built in vent shown closed (far left) and in an open position (near left).

NOTE: All glazed frames now include low-E 24mm glazing. Frames 1500mm high or above, include low-E toughened glass. Window sizes shown are nominal and will be approx 5 mm less than the size shown to allow for building in.